

WRR-P-E200 Series

Wisenet WAVE Network Video Recorder



WRR-P-E200 series offers an affordable and reliable shallow depth 1U rackmount solution for any entry-level deployment. Up to 42TB of raw video-optimized storage is provided by 24/7 duty cycle SATA drives.

The latest Intel® Xeon® E-2124 Processor allows for high powered computing power, and 16GB of DDR4 RAM provides the system resources to scale as needed.

A dedicated solid state drive for applications and the operating system enables fast boot and load times. The five-year, on-site, Next Business Day, Keep Your Hard Drive warranty ensures peace of mind.

Each server is pre-configured with Wisenet WAVE VMS and preloaded with 4 Professional licenses to ensure quick and easy deployment with minimum setup time.

Key Features

- Preloaded and configured with Wisenet WAVE video management system
- Up to 42TB of Raw Storage
- 470 Mbps of recording throughput
- SSD & 24/7 Duty Cycle SATA Drives
- Shallow Depth Server
- Includes USB mouse and keyboard
- Includes Sliding Rack Rail with Cable Management Arm
- 5-Year, On-site, Next Business Day, Keep Your Hard Drive Warranty
- Supports Wisenet and ONVIF conformant IP cameras
- IPMI Management



BUILT FOR SECURITY / VIDEO SURVEILLANCE

WRR-P-E200W / WRR-P-E200S / WRR-P-E200L

SYSTEM	
Video Management Software	Wisenet WAVE
Recording Bandwidth	Up to 470 Mbps
OS Drive Bays	1 x 240GB M.2.5 SSD (internally mounted)
OS / Data Drive Bays	4 x 3.5" Hot Swappable Bays (1 minimum used for OS)
Data Storage	Up to 42TB raw storage
Pre-loaded Licenses	4 x Wisenet WAVE Professional license
Network Interface	2 x RJ45 Gigabit Ethernet
Processor	1 x Intel® Xeon® E-2124 Series Processor, 3.30 to 4.30Ghz, 4 Cores / 4 Threads
Memory	16GB, 2 x 8GB DDR4
Operating System	Windows 10 Professional / Windows Server 2016 Standard / Ubuntu 18.04 LTS
Video Outputs	1 x VGA (For system configuration only. Not optimized for camera viewing)
USB Ports	2 x USB 3.0 (Rear), 1 x USB 2.0 (Front), 1 x USB 3.0 (Internal)
Other Ports	Serial
Keyboard & Mouse	Included
Sliding Rail Kit	Included, with Cable Management Arm

MECHANICAL / ELECTRICAL / ENVIRONMENTAL

Mechanical	Form Factor	1U shallow depth rack mount chassis
	Color / Material	Black / Metal
	Dimensions (WxDxH)	19" (482.6mm) x 24.2" (614.68mm) x 1.67" (42.8mm)
	Weight	Maximum 26.89 lb/12.2 Kg
Electrical	Power Supply	250W Bronze
	Power Input	100 ~ 240V AC
	Power Consumption	Maximum 250W
Environmental	Operating Temperature	Standard: 50°F ~ 95°F (10°C ~ 35°C) at 10% to 80% RH with 84.2°F maximum dew point. Refer to manual for operating temperature derating. Extended: 40°F ~ 104°F (5°C ~ 40°C) at 5% to 85% RH with 84.2°F dew point.
	Storage Temperature	-40°F ~ 149°F (-40°C ~ 65°C)
	Operating Humidity	10% to 80% RH with 84.2°F maximum dew point.
	Certification	UL, cUL, CB, FCC, 80 Plus Platinum

* Weight is on chassis without HDDs


* The latest product information / specification can be found at www.hanwhasecurity.com

* Bandwidth performance figures based on performance testing by Hanwha Techwin using Wisenet WAVE

Dimensions

Unit: inch (mm)

Chassis dimensions

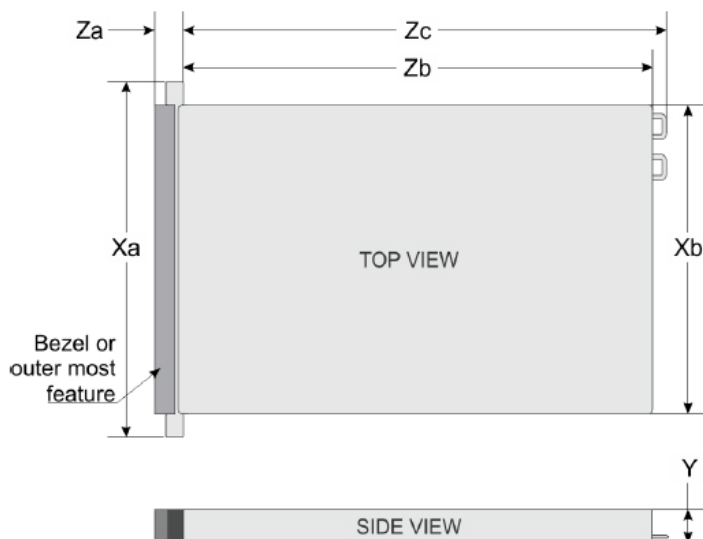

Chassis dimensions

Xa	Xb	Y	Za	Zb	Zc
482.0 mm (18.97 inches)	434.0 mm (17.08 inches)	42.8 mm (1.68 inches)	With bezel: 35.64 mm (1.4 inches) Without bezel: 22.0 mm (0.87 inches)	534.496 mm (21.04 inches)	573.506 mm (22.58 inches)