



The webinar will begin shortly...

Wisenet A series Product Introduction



Aaron Saks

Sr. Product & Technical Training Manager

Notes:

- This webinar is being recorded and will be available for replaying. The presentation materials will also be available in PDF format.
- Please visit <https://www.hanwhasecurity.com/training/upcoming-webinars/> to view webinars & sign up for future webinars.
- We will take Q&A time permitting. In case there is not time to get to all of the questions, we will reply to you individually afterwards. Please use the Chat or Q&A section.
- All participants have been put in to listen only mode.

Agenda

1. Introduction

- 1-1. FCC Certified
- 1-2. NDAA Compliant
- 1-3. Hanwha R&D and Production

2. Main Features

- 2-1 System Overview
- 2-2 Camera
- 2-3 NVR
- 2-4 Customer Support

3. Specifications

- 3-1. Camera specs
- 3-2. NVR specs
- 3-3. Accessories & Mounting Wisenet A series Cameras

1. Introduction

1-1. FCC Certified

1-2. NDAA Compliant

1-3. Hanwha R&D and Production

1-1. FCC Certified



Security and Surveillance Solutions Like No Other
Proven technology. Unrivaled performance. Trusted partner.



Intact




Professional



Intelligent

1-2. NDAA Compliant

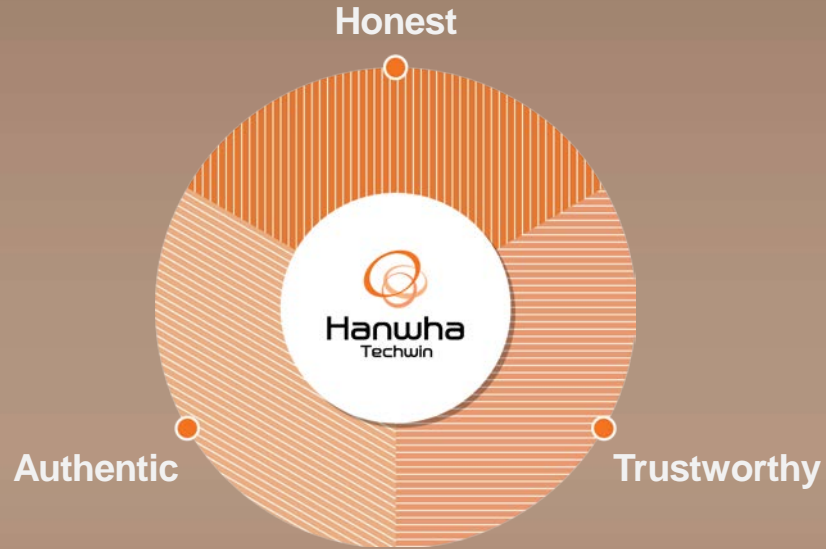

Hanwha Techwin offers reliable video surveillance Solution to meet the current and future need for security professional

1-3. Hanwha R&D and Production



Hanwha R&D, Korea

Hanwha Production Facility, Vietnam

In-House Design by Hanwha Techwin Korea,
In-House Production by Hanwha Techwin Global Production Facility

2. Main Features

- 2-1. System Overview
- 2-2. Camera
- 2-3. NVR
- 2-4. Customer Support

2-2. Main features

2-1. System Overview



2-2. Main features

2-2. 12 New Camera Models




**H.265 &
WiseStream II**
Improved bandwidth &
storage




IVA
Intelligent Video Analytics



True WDR
Up to 120dB



Hallway view
270° rotation support



LDC
Lens distortion correction



Real-time transmission
30fps @ maximum resolution

2-2. Main features

2-2. 12 New Camera Models



Built-in IR

**3-Axis Gimble for
camera rotation**


**Compact Flateye,
Vandal Dome, &
Bullet Form
Factors**

**White color
cameras**

2-2. Main features for Camera

(1) H.265 + WiseStream II

Extreme bandwidth reduction

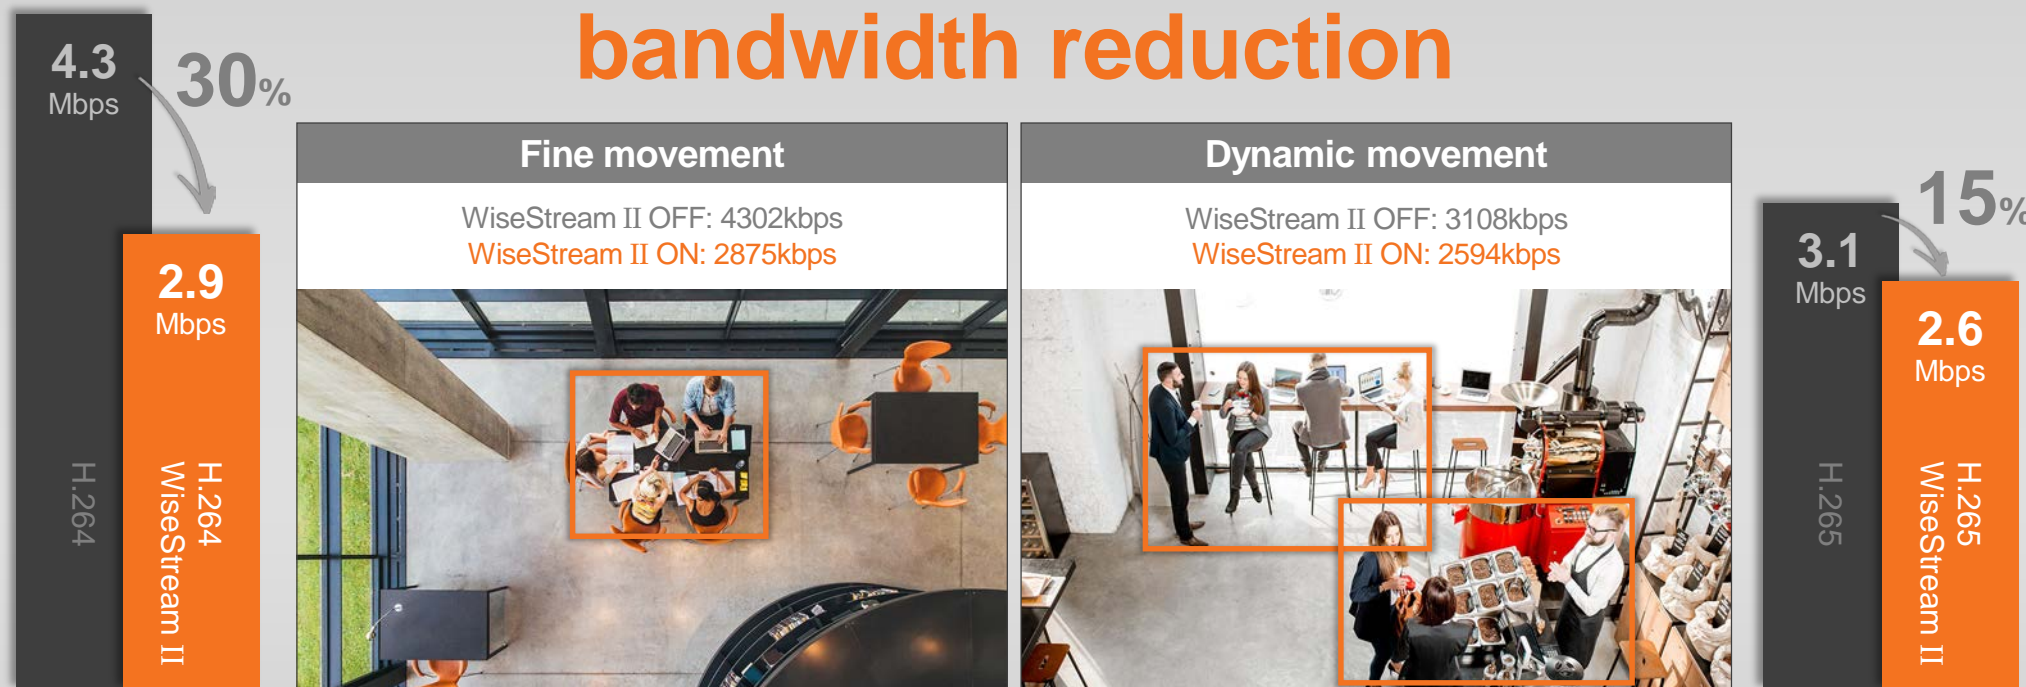

WiseStream II

Improved bandwidth & storage needs with enhanced data compression technology, with maintaining video quality.

2-2. Main features for Camera


(2) True WDR



True WDR

Supports **true** backlight compensation by exposure control up to 120dB, not by digital method.

(3) IVA - Area

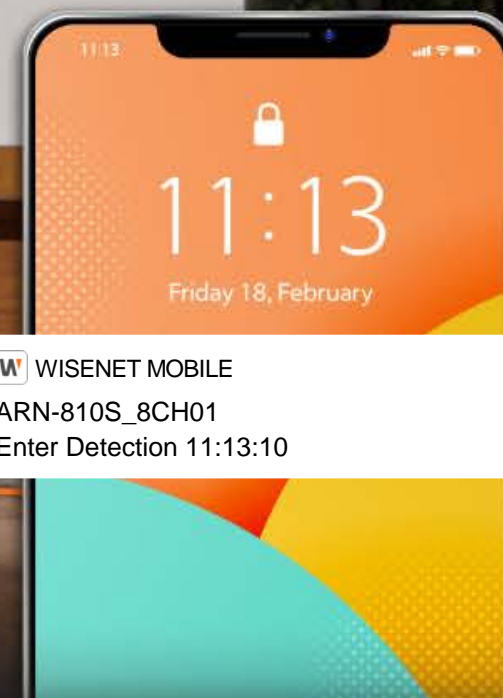


IVA (Intelligent Video Analytics)

Virtual setup, available enter/exit detection based on motion detection.

2-2. Main features for Camera

(3) IVA - Line

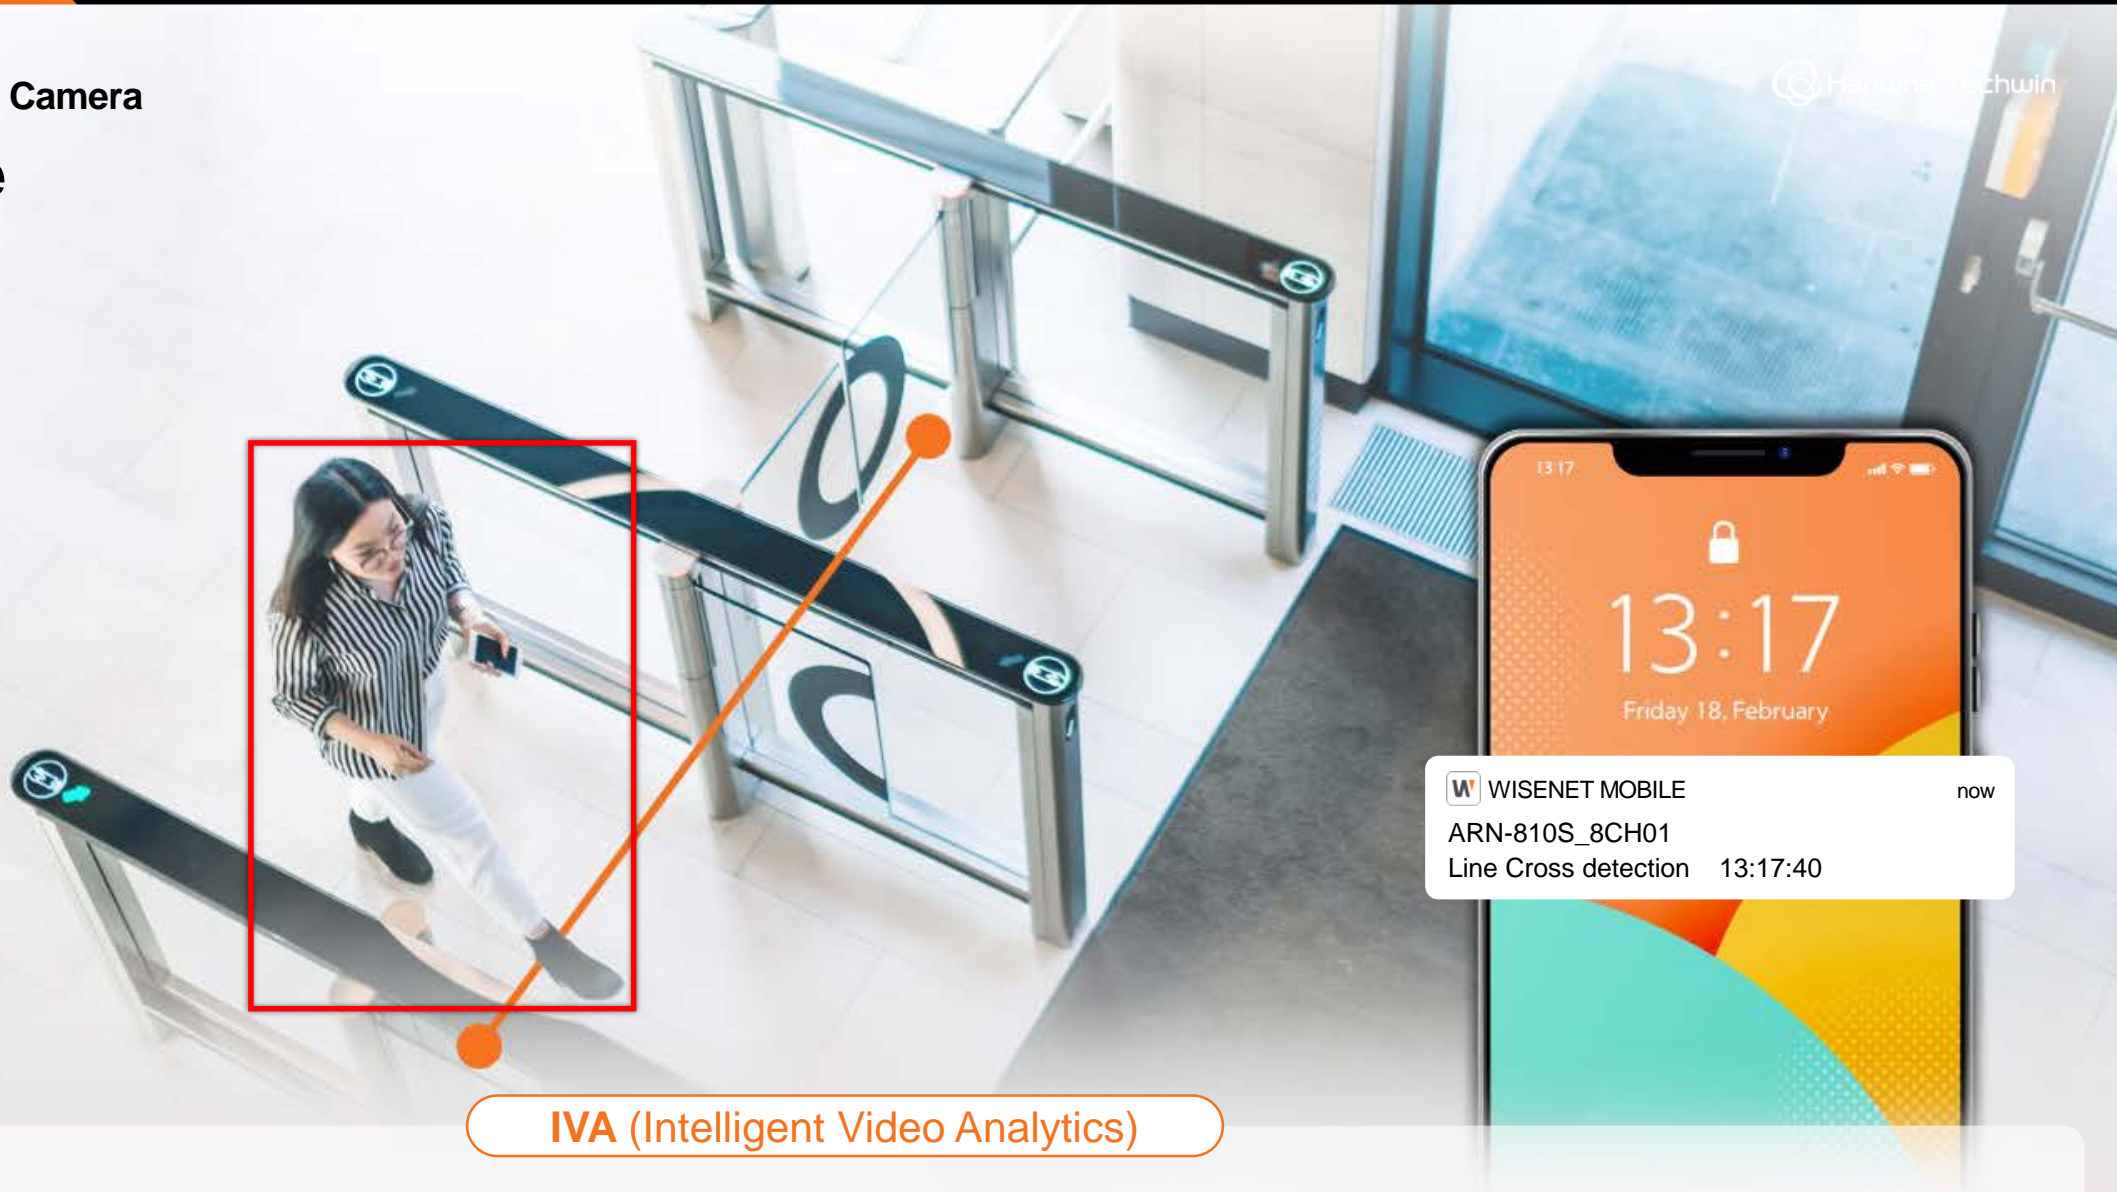

IVA (Intelligent Video Analytics)

Virtual line : Virtual line / directional detection based on motion detection.

2-2. Main features for Camera

(4) Hallway view



Rotate
90°



Hallway view

Support 90°, 180°, 270° rotation, optimizing surveillance range for vertical shaped area monitoring.

2-2. Main features for Camera

(5) LDC



LDC (Lens distortion correction)

Support distorted image correction and the operator can monitor more actual images.

2-2. Main features for Camera

(6) Real-time video transmission



20fps



30fps

Real-time video transmission

30fps at every resolution (H.265/H.264) for smooth video monitoring.

2. Main features

2-3. NVR



UHD

Up to 4K Monitor



P2P

Improved bandwidth



Wisenet Viewer

Windows, Apple macOS



H.265

Store more versus H.264



Wisenet Mobile

Google Android, Apple iOS




PoE

Power over Ethernet switch
built-in



2-3. Main features for NVR

(1) 4K Monitor Output

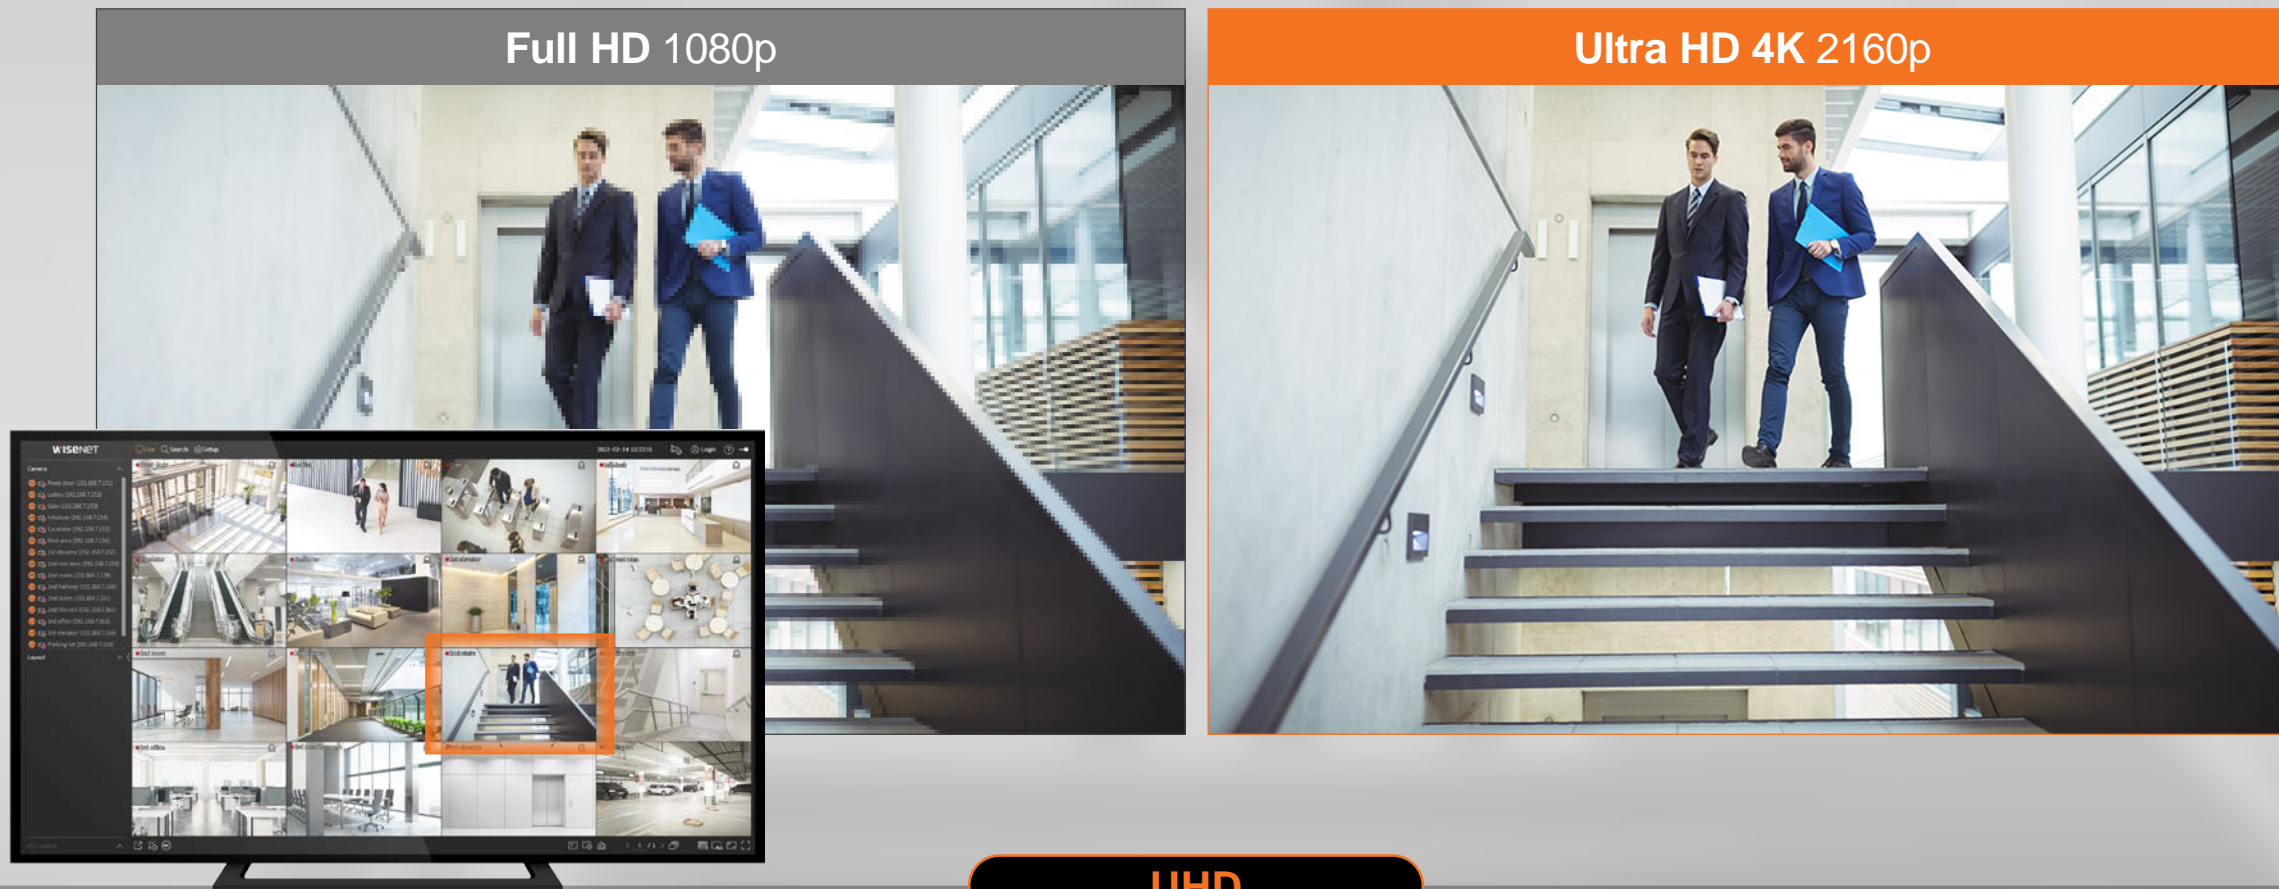

UHD

HDMI output support up to UHD (Ultra-high definition), which offers high quality images and viewing experience. Easy monitoring directly from the unit.

2-3. Main features for NVR

(2) NVR Installation Wizard

The screenshot displays the 'Installation wizard' interface with a progress bar at the top showing steps from Language to Easy connect. Below the progress bar, a large orange-bordered box highlights the 9 steps with their corresponding labels. At the bottom of the wizard, a table lists camera registration details for 16 channels.


STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP
01	02	03	04	05	06	07	08	09
Language	Network	Recorder ID/PW	Camera ID / PW	Date & Time	Resolution	Camera register	Channel setup	Easy connect
<input type="checkbox"/>	QNO-8020RA	192.168.7.152	00:09:18:A1:A2:04	Success	<input type="checkbox"/>	6		
<input type="checkbox"/>	QNO-8020RA	192.168.7.153	00:09:18:A1:A2:0D	Success	<input type="checkbox"/>	7		
<input type="checkbox"/>	QNO-8020RA	192.168.7.154	00:09:18:A1:A2:07	Success	<input type="checkbox"/>	8		
<input type="checkbox"/>	QNO-8020RA	192.168.7.155	00:09:18:A1:A2:01	Success	<input type="checkbox"/>	9		
<input type="checkbox"/>	QNO-8020RA	192.168.7.156	00:09:18:A1:A2:08	Success	<input type="checkbox"/>	10	Register >	
<input type="checkbox"/>	QNO-8020RA	192.168.7.157	00:09:18:A1:A2:12	Success	<input type="checkbox"/>	11	< Delete	
<input type="checkbox"/>	QNO-8020RA	192.168.7.158	00:09:18:A1:A2:0A	Success	<input type="checkbox"/>	12		
<input type="checkbox"/>	QNO-8020RA	192.168.7.159	00:09:18:A1:A2:05	Success	<input type="checkbox"/>	13		
<input type="checkbox"/>	QNO-8020RA	192.168.7.160	00:09:18:A1:A2:DC	Success	<input type="checkbox"/>	14		
<input type="checkbox"/>	QNO-8020RA	192.168.7.161	00:09:18:A1:A2:DF	Success	<input type="checkbox"/>	15		
<input type="checkbox"/>	QNO-8020RA	192.168.7.162	00:09:18:A1:A2:03	Success	<input type="checkbox"/>	16		

Quick setup for fast and easy installation

Complete the setup in 9 stages, including Network, Camera, Channel, Date & Time, Mobile/PC Connect

2-3. Main features for NVR

(3) Easy connect to Wisenet Viewer and Wisenet Mobile

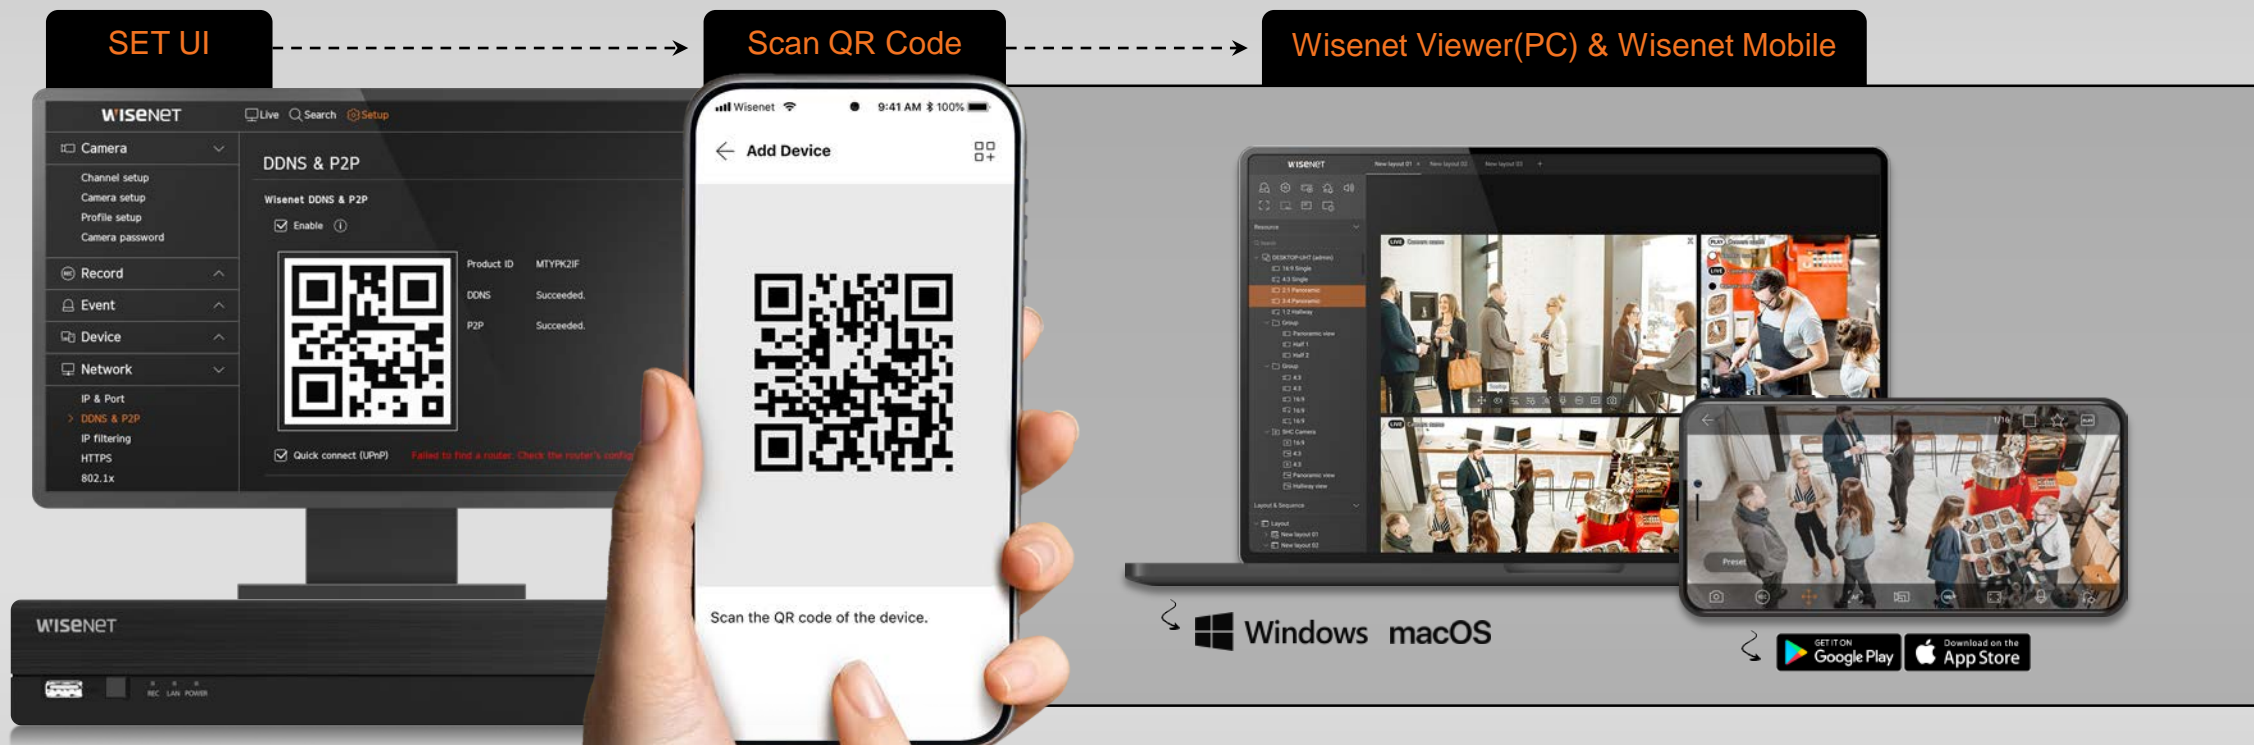

Quick and easy access from mobile and PC environment

Easy connect to your Wisenet Viewer and Wisenet Mobile
Just Scan QR Code or Input Product ID, access from anywhere

2-3. Main features for NVR

(4) Wisenet Viewer (PC)



PC viewer for NVR/DVR



Windows, macOS support



Flexible channel division and custom layout



Event-Action rule management



Display web pages & Media files play in the layout



Remote connection (DDNS/P2P)



2-3. Main features for NVR

2-4. Easy Customer Support



**Scan QR Code, and you can access
How to videos, FAQ, etc.**

3. Specification

3-1. Camera specs

3-2. NVR specs

3-3. Installation Guide for A series

2-2. Main features for Camera

3-1. Camera specs 1/2

Category		2MP			4MP		
		Bullet		Vandal Dome	Bullet		Vandal Dome
		ANO-L6012R	ANO-L6022R	ANV-L6012R	ANO-L7012R	ANO-L7022R	ANV-L7012R
Video	Imaging Device	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/3" CMOS	1/3" CMOS	1/3" CMOS
	Resolution	2M (1920x1080)	2M (1920x1080)	2M (1920x1080)	4M (2560x1440)	4M (2560x1440)	4M (2560x1440)
	Maximum Framerate	30fps	30fps	30fps	30fps	30fps	30fps
	Minimum Illumination	0.03lux (F2.0)	0.03lux (F2.0)	0.03lux (F2.0)	0.15lux (F2.0)	0.15lux (F1.6)	0.15lux (F2.0)
Lens	Focal Length	2.8mm Fixed	4mm Fixed	2.8mm Fixed	2.8mm Fixed	4mm Fixed	2.8mm Fixed
	Angular Field of View	H : 113.7° V : 61.5° D : 134.4°	H : 84.3° V : 45.6° D : 98.3°	H : 113.7° V : 61.5° D : 134.4°	H : 107.5° V : 59.7° D : 122°	H : 78.2° V : 41.2° D : 92°	H : 107.5° V : 59.5° D : 122°
Operation	Wide Dynamic Range	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)
	Analytics	Motion Detection, Tampering, IVA	Motion Detection, Tampering, IVA	Motion Detection, Tampering, IVA	Motion Detection, Tampering, Defocus Detection, IVA	Motion Detection, Tampering, Defocus Detection, IVA	Motion Detection, Tampering, Defocus Detection, IVA
	IR Viewable Length	30m (98.43ft)	30m (98.43ft)	30m (98.43ft)	20m (65.62ft)	25m (82.02ft)	20m (65.62ft)
Network	Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
	Streaming	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)
Environment	Certification	IP66	IP66	IP66/IK10	IP66	IP66	IP66/IK10
	Operating Temp. / Humidity	-30°C ~ +55°C / Less than 90% RH	-30°C ~ +55°C / Less than 90% RH	-30°C ~ +55°C / Less than 90% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH
Electrical	Input Voltage	PoE	PoE	PoE	PoE	PoE	PoE
	Power Consumption	Max 6.4W, Typical 5.0W	Max 6.4W, Typical 5.0W	Max 6.4W, Typical 5.0W	Max 7.5W, Typical 5.7W	Max 7.5W, Typical 5.7W	Max 7.5W, Typical 5.7W

2-2. Main features for Camera

3-1. Camera specs 2/2 (Motorized Varifocal / Flateye)

Category		2MP			4MP		
		Bullet	Vandal Dome	Flateye	Bullet	Vandal Dome	4MP
		ANO-L6082R	ANV-L6082R	ANE-L6012R	ANO-L7082R	ANV-L7082R	ANE-L7012R
Video	Imaging Device	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS
	Resolution	2M (1920x1080)	2M (1920x1080)	2M (1920x1080)	4M (2560x1440)	4M (2560x1440)	4M (2560x1440)
	Maximum Framerate	30fps	30fps	30fps	30fps	30fps	30fps
	Minimum Illumination	0.03lux (F1.6)	0.03lux (F2.0)	0.03lux (F1.6)	0.1lux (F1.6)	0.03lux (F2.0)	0.13lux (F1.6)
Lens	Focal Length	3.3~10.3mm Motorized VF	3.3~10.3mm Motorized VF	2.8mm Fixed	3.3~10.3mm Motorized VF	3.3~10.3mm Motorized VF	2.8mm Fixed
	Angular Field of View	H : 105.2° ~ 30.6° V : 54.8° ~ 17.2° D : 126.9° ~ 35.1°	H : 105.2° ~ 30.6° V : 54.8° ~ 17.2° D : 126.9° ~ 35.1°	H : 107.7° V : 59.0° D : 126.7°	H : 94.8° ~ 28.1° V : 50.2° ~ 15.8° D : 112.9° ~ 32.2°	H : 94.8° ~ 28.1° V : 50.2° ~ 15.8° D : 112.9° ~ 32.2°	H : 98.3° V : 54.2° D : 114.6°
Operation	Wide Dynamic Range	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)	WDR (120dB)
	Analytics	Motion Detection, Tampering, IVA	Motion Detection, Tampering, IVA	Motion Detection, Tampering, iVA	Motion Detection, Tampering, Defocus Detection, IVA	Motion Detection, Tampering, Defocus Detection, IVA	Motion Detection, Tampering, Defocus Detection, IVA
	IR Viewable Length	30m (98.43ft)	30m (98.43ft)	20m (65.62ft)	30m (98.43ft)	30m (98.43ft)	20m (65.62ft)
Network	Video Compression	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG	H.265, H.264, MJPEG
	Streaming	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)	Unicast(6 users) / Multicast, Multiple streaming (Up to 3 profiles)
Environment	Certification	IP66	IP66/IK10	IP67/IK10	IP66	IP66/IK10	IP67/IK10
	Operating Temp. / Humidity	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH	-30°C ~ +55°C / Less than 95% RH
Electrical	Input Voltage	PoE	PoE	PoE	PoE	PoE	PoE
	Power Consumption	Max 7.0W, Typical 5.0W	Max 7.0W, Typical 5.0W	Max 6.6W, Typical 4.8W	Max 8.0W, Typical 6.0W	Max 8.0W, Typical 6.0W	Max 7.5W, Typical 5.7W

3. Specification

3-1. Camera specs



Vandal Dome Camera

ANV-L6012R / ANV-L7012R

Category	Specification
Resolution	4MP / 2MP
Lens	2.8mm Fixed lens
Framerate	30fps@ maximum resolution
Wide Dynamic Range	120dB
Analytics	Motion detection, Tampering, IVA (Enter/Exit, Directional detection, Virtual line) Defocus detection : ANV-L7012R
Power Consumption	Maximum 6.4W, Typical 5.0W (PoE): ANV-L6012R Maximum 7.5W, Typical 5.7W (PoE): ANV-L7012R
Certification	IP66, IK10
Application Programming Interface	ONVIF Profile S/G/T SUNAPI (HTTP API)

3. Specification

3-1. Camera specs



Vandal Dome Camera

ANV-L6082R / ANV-L7082R

Category	Specification
Resolution	4MP / 2MP
Lens	3.3 ~ 10.3mm Motorized Varifocal lens
Framerate	30fps@ maximum resolution
Wide Dynamic Range	120dB
Analytics	Motion detection, Tampering, IVA (Enter/Exit, Directional detection, Virtual line) Defocus detection : ANV-L7082R
Power Consumption	Maximum 7.0W, Typical 5.0W (PoE) : ANV-L6082R Maximum 8.0W, Typical 6.0W (PoE) : ANV-L7082R
Certification	IP66, IK10
Application Programming Interface	ONVIF Profile S/G/T SUNAPI (HTTP API)

3-1. Camera specs



ANE-L6012R / ANE-L7012R

Category	Specification
Resolution	4MP / 2MP
Lens	2.8mm Fixed lens
Framerate	30fps@ maximum resolution
Wide Dynamic Range	120dB
Analytics	Motion detection, Tampering, IVA (Enter/Exit, Directional detection, Virtual line) Defocus detection :ANE-L7012R
Power Consumption	Maximum 6.6W, Typical 4.8W (PoE) : ANE-L6012R Maximum 7.5W, Typical 5.7W (PoE) : ANE-L7012R
Certification	IP67, IK10
Application Programming Interface	ONVIF Profile S/G/T SUNAPI (HTTP API)

Flateye Camera

3. Specification

3-1. Camera specs



Bullet Camera

ANO-L6012R / ANO-L6022R / ANO-L7012R / ANO-L7022

Category	Specification
Resolution	4MP / 2MP
Lens	2.8mm (ANO-L6012R / ANO-L7012R) 4mm (ANO-L6022R / ANO-L7022R)
Framerate	30fps@ maximum resolution
Wide Dynamic Range	120dB
Analytics	Motion detection, Tampering, IVA (Enter/Exit, Directional detection, Virtual line) Defocus detection : ANO-L7012R / ANO-L7022R
Power Consumption	Maximum 6.4W, Typical 5.0W (PoE): ANO-L6012R / ANO-L6022R Maximum 7.5W, Typical 5.7W (PoE): ANO-L7012R / ANO-L7022R
Certification	IP66
Application Programming Interface	ONVIF Profile S/G/T SUNAPI (HTTP API)

3. Specification

3-1. Camera specs






Bullet Camera

ANO-L6082R / ANO-L7082R

Category	Specification
Resolution	4MP / 2MP
Lens	3.3 ~ 10.3mm Motorized Varifocal lens
Framerate	30fps@ maximum resolution
Wide Dynamic Range	120dB
Analytics	Motion detection, Tampering, IVA (Enter/Exit, Directional detection, Virtual line) Defocus detection : ANO-L7082R
Power Consumption	Maximum 7.0W, Typical 5.0W (PoE) : ANO-L6082R Maximum 8.0W, Typical 6.0W (PoE) : ANO-L7082R
Certification	IP66
Application Programming Interface	ONVIF Profile S/G/T SUNAPI (HTTP API)






















3. Specification

3-2. NVR specs

Category		 ARN-410S	 ARN-810S	 ARN-1610S
IP Camera	Channels	4 Channels	8 Channels	16 Channels
	Supported Resolution	8MP ~ CIF		
	Protocols	SUNAPI, ONVIF		
Local Display	HDMI	HDMI	HDMI, VGA (Clone)	
Recording	Compression	H.265, H.264, MJPEG		
	Recording Bandwidth	Maximum 40Mbps	Maximum 60Mbps	Maximum 80Mbps
Storage	HDD Slot	SATA 1ea (Maximum 6TB)	SATA 1ea (Maximum 6TB)	SATA 2ea (Maximum 12TB)
Network	Transmission Bandwidth	Maximum 40Mbps	Maximum 60Mbps	Maximum 80Mbps
Remote Connection	Web viewer	Google Chrome, Microsoft Edge, Mac Safari		
	Smart phone	iOS, Android		
	PC viewer (Wisenet Viewer)	Windows, Apple macOS		
	Easy configuration	P2P (QR code / Product ID)		
Environmental	Operating Temperature	0°C to +40°C (32°F to 104°F)		
	Operating Humidity	20% ~ 85% RH		
Electrical	Power Input	54VDC / 1.20A	54VDC / 1.67A	100 ~ 240 VAC
	Power Consumption	Maximum 52W (1HDD, PoE On)	Maximum 84W (1HDD, PoE On)	Maximum 188.2W (2HDD, PoE On)
	PoE Budget	35W	65W	130W

3. Accessories


3-3. A series Accessories

							
Backbox SBV-A14B	Hanging Mount SBP-122HMW (Fixed Vandal Dome Only)	Hanging Mount SBP-301HMW2 (V. Focal Dome Only)	Hanging Mount SBP-125HMW (ANE series)	Ceiling Mount SBP-300CMW	Ceiling Mount SBP-156CMW	In-ceiling Housing SHD-1408FPW (ANV series)	In-ceiling Housing SHD-1408FW (ANV-L70X2R)
							
Weather Cap SBV-120WCW (ANV-L60X2R)	Wall Mount SBP-137WMW1 (ANV series)	Wall Mount SBP-125WMW (ANE series)	Wall Mount SBP-300WMW1	Wall Mount SBP-300WMW	Wall Mount Base SBP-300BW	Installation Box SBP-300NBW	Pole Mount SBP-300PMW1
							
Corner Mount SBP-300KMW1	Parapet Mount SBP-300LMW	Parapet Mount SBP-156LMW	Smoke Dome SPB-VAW12 (ANV-L60X2R)	Smoke Dome SPB-VAW72 (ANV-L70X2R)			


Ceiling



Back Box
SBV-A14B

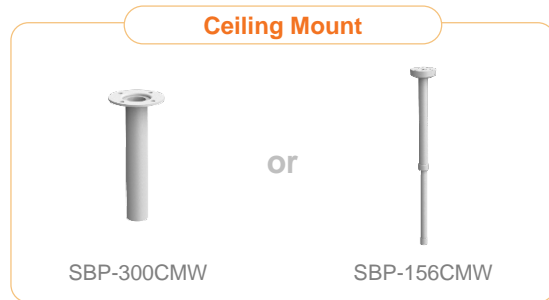

Hanging Mount
SBP-122HMW (Fix Lens Dome Only)

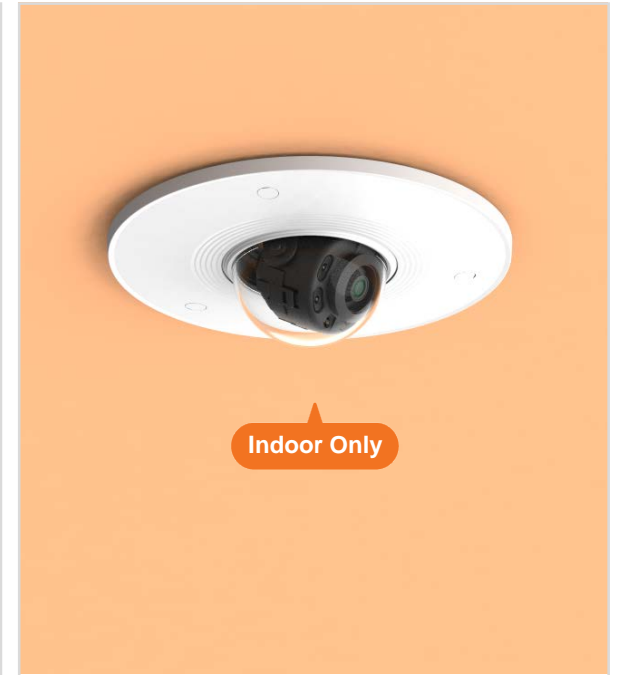

Indoor Only




In-ceiling Housing
SHD-1408FPW

Wall



Back Box
SBV-A14B



Weather Cap
SBV-120WCW



Wall Mount
SBP-137WMW1



Option

Installation Box SBP-300NBW or Wall Mount Base SBP-300BW


Wall Mount

SBP-300WMW1 or SBP-300WMW

Hanging Mount

SBP-122HMW (Fix Lens Dome only)

Pole

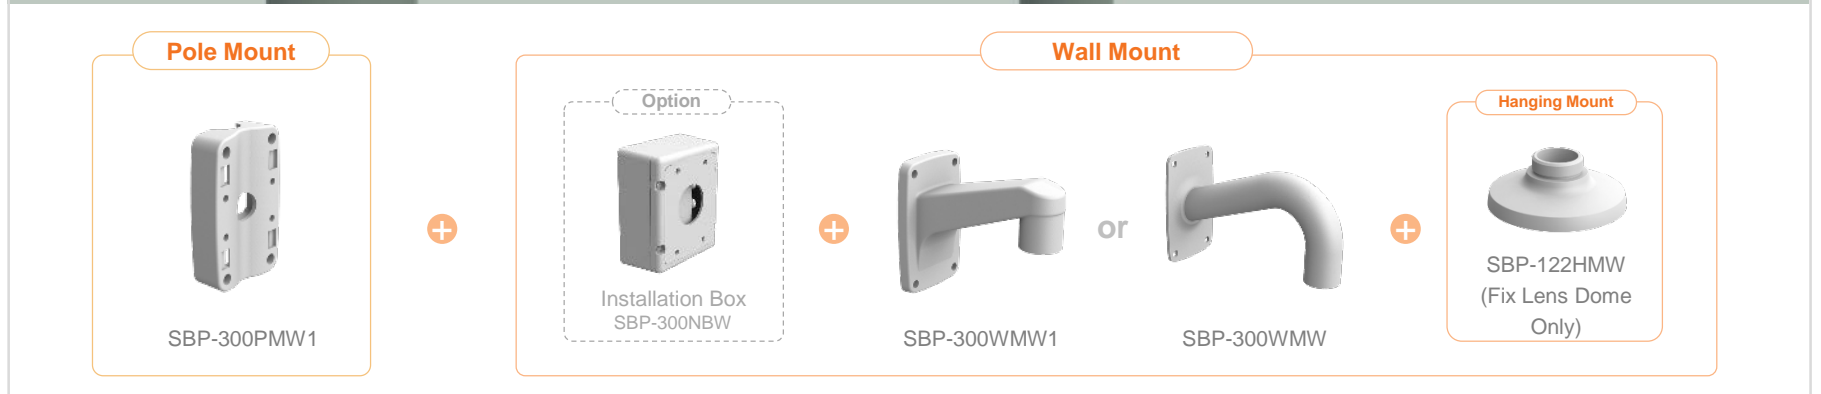

Corner



Corner Mount
SBP-300KMW1

Back Box
SBV-A14B

Corner Mount
SBP-300KMW1

Wall Mount
SBP-137WMW1

<p>Corner Mount</p> <p>SBP-300KMW1</p>	<p>Option</p> <p>Installation Box SBP-300NBW</p>	<p>Wall Mount</p> <p>SBP-300WMW1 or SBP-300WMW</p>	<p>Hanging Mount</p> <p>SBP-122HMW (Fix Lens Dome Only)</p>
---	---	---	--

Parapet & ETC



Parapet Mount

SBP-300LMW

Hanging Mount

SBP-122HMW (Fix Lens Dome Only)



Parapet Mount

SBP-156LMW

Hanging Mount

SBP-122HMW (Fix Lens Dome Only)

Smoke Dome Cover

SPB-VAW12

Ceiling



Back Box
SBV-A14B



Ceiling Mount



SBP-300CMW

or




SBP-156CMW

+



Hanging Mount
SBP-301HMW2 (V. Focal Lens Only)

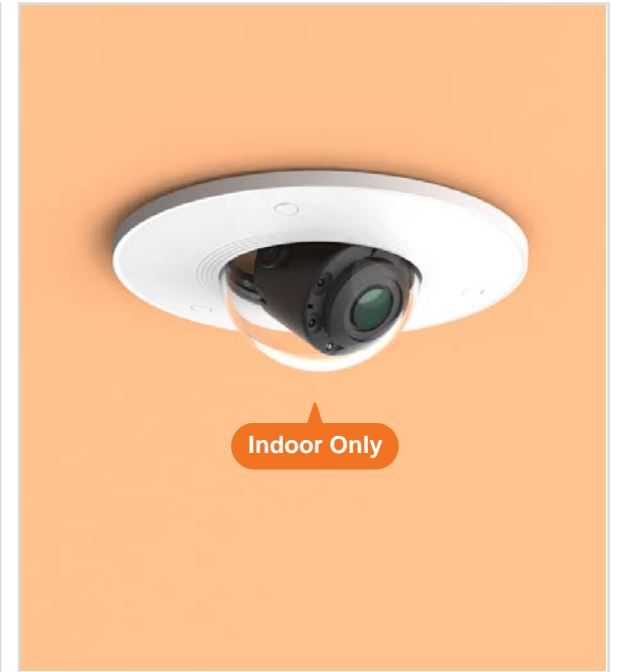

Indoor Only



or



In-ceiling Housing
SHD-1408FPW / SHD-1408FW

Wall




Back Box
SBV-A14B



Wall Mount
SBP-137WMW1



Option

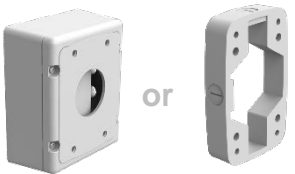

Installation Box SBP-300NBW or Wall Mount Base SBP-300BW

Wall Mount



SBP-300WMW1 or SBP-300WMW2

Hanging Mount



SBP-301HMW2 (V. Focal Lens Only)

Pole



Corner



Corner Mount
SBP-300KMW1

Back Box
SBV-A14B

Corner Mount
SBP-300KMW1

Wall Mount
SBP-137WMW1

<p>Corner Mount</p> <p>SBP-300KMW1</p>	<p>Option</p> <p>Installation Box SBP-300NBW</p>	<p>Wall Mount</p> <p>SBP-300WMW1 or SBP-300WMW</p>	<p>Hanging Mount</p> <p>SBP-301HMW2 (V.Focal Lens Only)</p>
---	---	---	--

Parapet & Etc.



Parapet Mount

SBP-300LMW

Hanging Mount

SBP-301HMW2



Parapet Mount

SBP-156LMW

Hanging Mount

SBP-301HMW2 (V. Focal Lens Only)

Smoke Dome Cover

SPB-VAW72

Ceiling (ANE)



Back Box
SBV-A14B



Ceiling Mount



SBP-300CMW

or



SBP-156CMW

+



Hanging Mount
SBP-125HMW

Wall (ANE)



Back Box
SBV-A14B



Wall Mount
SBP-125WMW



Option



Installation Box SBP-300NBW or Wall Mount Base SBP-300BW

+

Wall Mount



SBP-300WMW1 or SBP-300WMW

+

Hanging Mount



SBP-125HMW

Pole (ANE)



Back Box
SBV-A14B

Pole Mount



SBP-300PMW1



Option



Installation Box
SBP-300NBW



SBP-300WMW1



or



SBP-300WMW



Hanging Mount



SBP-125HMW

Corner (ANE)



+



Corner Mount
SBP-300KMW1

Back Box
SBV-A14B




+



Corner Mount
SBP-300KMW1

Wall Mount
SBP-125WMW1

Corner Mount



SBP-300KMW1

Option



Installation Box
SBP-300NBW

+

+

Wall Mount



SBP-300WMW1

SBP-300WMW


+

Hanging Mount



SBP-125HMW

Parapet (ANE)

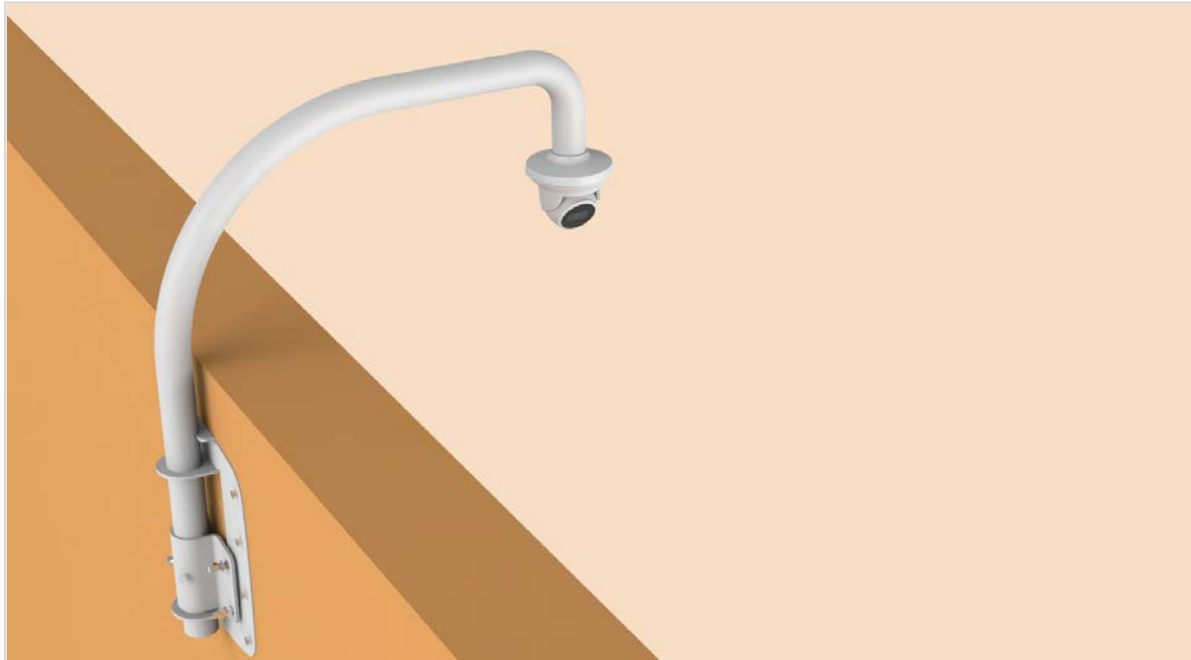

Parapet Mount
SBP-300LMW



Hanging Mount
SBP-125HMW



Parapet Mount
SBP-156LMW



Hanging Mount
SBP-125HMW



Wall & Pole & Corner (All Bullet Models)



Back Box
SBV-A14B



Back Box
SBV-A14B

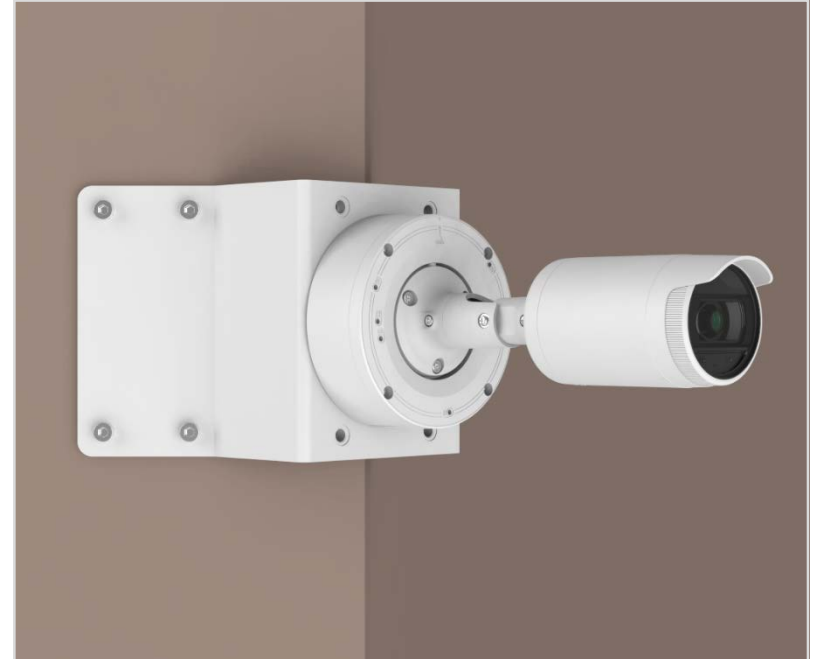

Corner Mount
SBP-300KMW1



Back Box
SBV-A14B

Questions?